



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/715,499	11/19/2003	Ryuichi Kojima	117804	4501
25944	7590	11/16/2005	EXAMINER	
OLIFF & BERRIDGE, PLC P.O. BOX 19928 ALEXANDRIA, VA 22320			NGUYEN, LAMSON D	
			ART UNIT	PAPER NUMBER
			2861	

DATE MAILED: 11/16/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

DETAILED ACTION

Claim Objections

Claims 3, 7, 17-18 are objected to because of the following informalities:

- In claims 3 and 7, it is not clear what p is.
- In claims 17-18, It is not clear what density of the dot fluctuated up and down at each dot means. Also, "the dot" lacks antecedent bases. It's not clear what density of the dot is.

Appropriate correction is required.

Claim Rejections - 35 USC § 102

The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(a) the invention was known or used by others in this country, or patented or described in a printed publication in this or a foreign country, before the invention thereof by the applicant for a patent.

Claim 1 is rejected under 35 U.S.C. 102(a) as being anticipated by Bates et al. (6,923,521).

Bates et al teach an inkjet printhead comprising:

Claim 1:

- a plurality of ejectors that are two-dimensionally arranged such that when dots of the droplets ejected on a recording medium are viewed in a main scanning direction, which is orthogonal to the main scanning direction, the

sizes of dot diameters are changed at random (figure 3 teaches a printhead 26 with a plurality of nozzles; figure 11 teaches large drops represented by large circles are disposed in a random fashion)

The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(a) the invention was known or used by others in this country, or patented or described in a printed publication in this or a foreign country, before the invention thereof by the applicant for a patent.

Claims 2, 4, 19 are rejected under 35 U.S.C. 102(a) as being anticipated by Morikawa et al. (6,595,614).

Morikawa et al teach an inkjet head comprising;

Claim 2:

- a plurality of ejectors that are two-dimensionally arranged such that when the ejectors are viewed in order in the main-scanning-orthogonal direction, positions of the ejectors in the main scanning direction alternate in an offsetting manner (figure 3)

Claim 4:

- the offsetting alternation of the position of the ejector in the main scanning direction occurs at each ejector (figure 3 teaches all the nozzles are offset in the main scanning direction)

Claim 19:

- a droplet ejecting head (figure 3)

Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

Claim 3 is rejected under 35 U.S.C. 103(a) as being unpatentable over Morikawa in view of Anderson et al (6,742,866).

Morikawa teaches all claimed features of the invention except:

- the spatial frequency of offsetting of alternation of the position of the ejector in the main scanning direction is in a range of 2.5 to 254 um

It is well-known in the art of inkjet printers to have offsetting nozzles in the main scanning direction when viewed in the main-scanning orthogonal direction in the range of 2.5 to 254 um, as taught by Anderson (figure 3a teaches nozzle 320 is offset from nozzle 160 by 1/600 which translates to 41.6 um).

Therefore, it would have been obvious to one having ordinary skill in the art at the time of the invention to modify the invention of Morikawa to incorporate the teaching of nozzle offset of 41.6m taught by Anderson for the purpose of achieved improved printing resolution.

Claims 5, 7, 9 are rejected under 35 U.S.C. 103(a) as being unpatentable over Morikawa et al.

Morikawa et al teach an inkjet head comprising:

- (claim 5) the ejectors are divided, in the main scanning direction, into k ejector blocks, each ejector block includes at least one ejector unit includes n ejectors adjacent in the main scanning direction, the ejectors of each ejector unit are offset from each other in the main scanning-orthogonal direction (figure 3 teaches 4 nozzle blocks 35a-d, each block has a plurality of nozzles 36 that are offset to each other in the main-scanning direction).
- (claim 7) wherein one ejector unit of one ejector block is offset in the main scanning-orthogonal direction
- (claim 9) wherein the n is an odd number (figure 3 teaches 4 ejector blocks each block comprises 1 unit of 35a, 35b, 35c, and 35d)

However, Morikawa et al do not teach:

- (claim 5) the the ejectors of two adjacent blocks are offset by pxk
- (claim 7) the ejector unit is offset to another unit in the main scanning orthogonal direction by p

It is well-known in the art of inkjet printers to have ejectors in adjacent blocks to be offset and adjacent ejector units to be offset.

It would have been obvious to one having ordinary skill in the art at the time of the invention to modify the invention of Morikawa to have ejectors in adjacent blocks to be offset by $p \times k$ and adjacent ejector units to be offset by p for the purpose of increasing resolution, since it has been held to be within the general skill of a worker in the art that discovering an optimum value of a result effective variable involves only routine skill in the art. **In re Boesch, 617 F.2d 272, 205 USPQ 215 (CCPA 1980).**

Claims 10-11, 13, 15, 18, and 20 are rejected under 35 U.S.C. 103(a) as being unpatentable over Morikawa in view of Anderson.

Morikawa teaches an inkjet head comprising:

Claim 10:

- a plurality of ejectors which are two-dimensionally arranged, wherein the ejectors are arranged such that when the ejectors are viewed in order in a main-scanning orthogonal direction, two ejectors adjacent in the main scanning direction are prevented from being adjacent to each other in the main (figure 2.2 or figure 3)

Claim 11:

- the ejectors are divided, in the main scanning direction, into k ejector blocks, each ejector block includes at least one ejector unit includes n ejectors adjacent in the main scanning direction, the ejectors of each ejector unit are

offset from each other in the main scanning-orthogonal direction (figure 3 teaches 4 nozzle blocks 35a-d, each block has a plurality of nozzles 36 that are offset to each other in the main-scanning direction).

Claim 13:

- the ejectors are divided, in the main scanning direction, into k ejector blocks, each ejector block includes at least one ejector unit includes n ejectors adjacent in the main scanning direction, the ejectors of each ejector unit are offset from each other in the main scanning-orthogonal direction (figure 3 teaches 4 nozzle blocks 35a-d, each block has a plurality of nozzles 36 that are offset to each other in the main-scanning direction).

Claim 15:

- wherein the n is an odd number (figure 3 teaches 4 ejector blocks each block comprises 1 unit of 35a, 35b, 35c, and 35d)

Claim 20:

- a droplet ejecting head (figure 3)

However, Morikawa does not teach:

- (claim 10) the spatial frequency of offsetting of alternation of the position of the ejector in the main scanning direction is in a range of 2.5 to 254 μm

Art Unit: 2861

- (claim 11) the the ejectors of two adjacent blocks to be pxk
- (claim 13) the ejector unit is offset to another unit in the main scanning orthogonal direction by p

It is well-known in the art of inkjet printers to have offsetting nozzles in the main scanning direction when viewed in the main-scanning orthogonal direction in the range of 2.5 to 254 μm , as taught by Anderson (figure 3a teaches nozzle 320 is offset from nozzle 160 by $1/600$ which translates to 41.6 μm).

Therefore, it would have been obvious to one having ordinary skill in the art at the time of the invention to modify the invention of Morikawa to incorporate the teaching of nozzle offset of 41.6 μm taught by Anderson for the purpose of achieved improved printing resolution.

It is well-known in the art of inkjet printers to have ejectors in adjacent blocks to be offset and adjacent ejector units to be offset.

It would have been obvious to one having ordinary skill in the art at the time of the invention to modify the invention of Morikawa to have ejectors in adjacent blocks to be offset by $p \times k$ and adjacent ejector units to be offset by p for the purpose of increasing resolution, since it has been held to be within the general skill of a worker in the art that discovering an optimum value of a result effective variable involves only routine skill in the art. **In re Boesch, 617 F.2d 272, 205 USPQ 215 (CCPA 1980).**

Claims 16-17 are rejected under 35 U.S.C. 103(a) as being unpatentable over Morikawa in view of Anderson as applied to claims 10 above, and further in view of Bates.

Morikawa in view of Anderson teach all claimed features except:

- (claim 16) wherein the ejectors are arranged such that, when dots are viewed in a main scanning-orthogonal direction, the sizes of dot diameters are changed at random
- (claim 17) the dots of the droplets ejected are viewed in the main scanning orthogonal direction density of the dot is fluctuated up and down at each dot

Meanwhile, Bates a plurality of ejectors that are two-dimensionally arranged such that when dots of the droplets ejected on a recording medium are viewed in a main scanning direction, which is orthogonal to the main scanning direction, the sizes of dot diameters are changed at random (figure 3 teaches a printhead 26 with a plurality of nozzles; figure 11 teaches large drops represented by large circles are disposed in a random fashion) and that the dots of the droplets ejected are viewed in the main scanning orthogonal direction density of the dot is fluctuated up and down at each dot (figure 11).

Therefore, it would have been obvious to one having ordinary skill in the art at the time the invention was made to modify the invention of Morikawa in view of

Anderson to incorporate the teaching of different sized dots taught by Bates for the purpose of achieving higher resolution with fewer passes.

Claim 18 is rejected under 35 U.S.C. 103(a) as being unpatentable over Morikawa in view of Anderson as applied to claims 10-11 above, and further in view of Bates.

Morikawa in view of Anderson teach all claimed features except:

- wherein the ejectors are arranged such that, when dots are viewed in a main scanning-orthogonal direction, the sizes of dot diameters are changed at random and a cycle of the fluctuation is pxk

Meanwhile, Bates a plurality of ejectors that are two-dimensionally arranged such that when dots of the droplets ejected on a recording medium are viewed in a main scanning direction, which is orthogonal to the main scanning direction, the sizes of dot diameters are changed at random (figure 3 teaches a printhead 26 with a plurality of nozzles; figure 11 teaches large drops represented by large circles are disposed in a random fashion) and that the dots of the droplets ejected are viewed in the main scanning orthogonal direction density of the dot is fluctuated up and down at each dot (figure 11).

Therefore, it would have been obvious to one having ordinary skill in the art at the time the invention was made to modify the invention of Morikawa in view of

Art Unit: 2861

Anderson to incorporate the teaching of different sized dots taught by Bates for the purpose of achieving higher resolution with fewer passes.

It would have been obvious to one having ordinary skill in the art at the time of the invention to modify the invention of Morikawa in view of Anderson and further view of Bates to have and a cycle of the fluctuation is pxk, since it has been held to be within the general skill of a worker in the art that discovering an optimum value of a result effective variable involves only routine skill in the art. **In re Boesch, 617 F.2d 272, 205 USPQ 215 (CCPA 1980).**

Allowable Subject Matter


Claims 6 and 12 are objected to as being dependent upon a rejected base claim, but would be allowable if rewritten in independent form including all of the limitations of the base claim and any intervening claims.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Lamson D. Nguyen whose telephone number is 571-272-2259. The examiner can normally be reached on 8-5.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Dave Talbott can be reached on 571-272-1934. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Art Unit: 2861

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

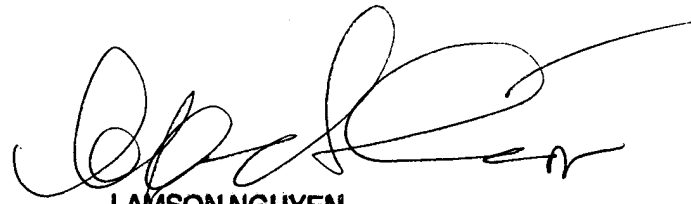

LAMSON NGUYEN
PRIMARY EXAMINER
11/12/05